







Series 366

RTX

N

1450rpm

Ø 30mm

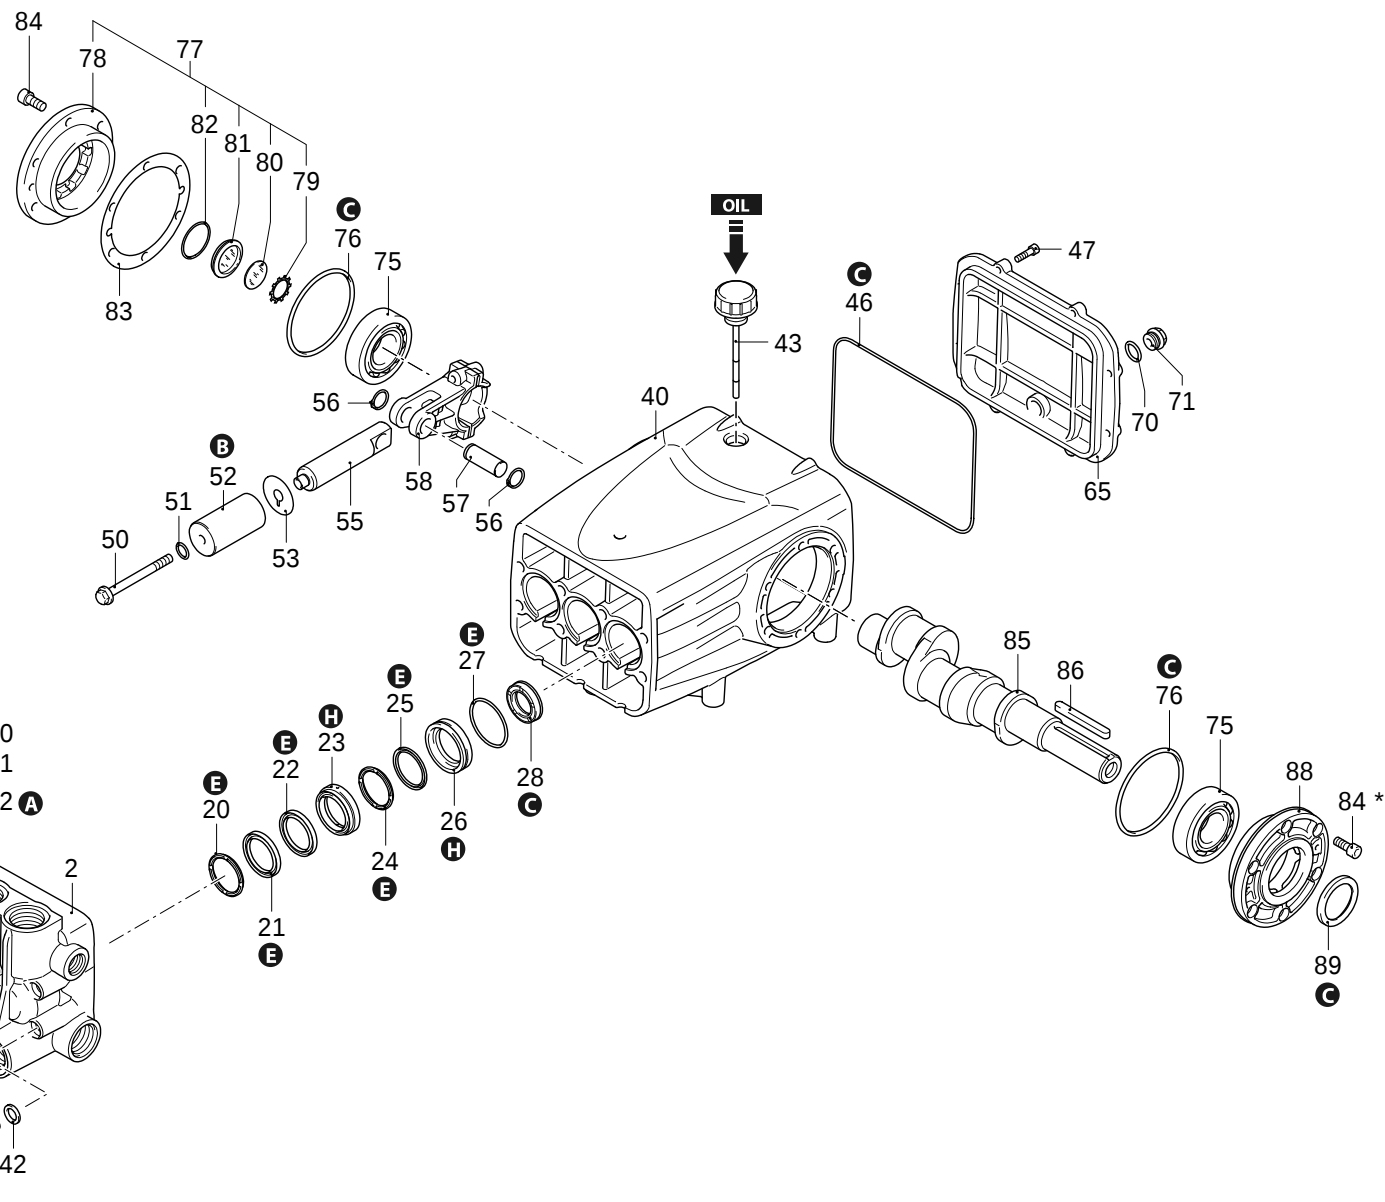

AR_s366-01_v01

09/10/2024



Series 366

RTX

N

1450rpm

ø 30mm

P	Code	Description	Q	Assembly prescription	Validity	P	Code	Description	Q	Assembly prescription	Validity
1	3669201	Head assembly	Ø 30 nickel plated	1		71	2282280	Plug	with magnet	1	C=20Nm
2	3660020	Head	nickel plated	1		75	3660290	Bearing		2	
3	2820620	Plug	1"G nickel	1	C=300Nm / Loxeal 55-14	76	3660740	O-ring	Ø 83x3	2	
4	390291	O-ring	Ø 28,25x2,62	1		77	3669002	Cover		1	
5	2820490	Plug	1/2" G nickel	1	C=25Nm / Loxeal 55-14	78	3660050	Cover		1	
6	1540120	Washer		1		79	1941290	Ring		1	
7	1380690	Plug	1/4" G nickel	1	C=15Nm / Loxeal 55-14	80	1941260	Plate		1	
8	820510	O-ring	Ø 10,82x1,78	1		81	1941270	Level gauge		1	
9	3660190	Plug	nickel	6	C=300Nm	82	100410	O-ring	Ø 34,6x2,62	1	
10	2821390	Ring	anti-extrusion	6		83	3660260	Shim 0.05mm		1	
11	1540630	O-ring	Ø 23,47x2,62	6	Lubricate with grease Molykote PG54	83	3660270	Shim 0.10mm		1	
12	3669051	Complete valve	delivery	3		83	3660280	Shim 0.19mm		1	
13	3669050	Complete valve	suction	3		84	180030	Screw	TCEI M8x20	6	C=24,5Nm
20	3660460	Ring	support Ø 30	3	Lubricate with grease Molykote PG54	84*	180030	Screw	TCEI M8x20	6	C=24,5Nm
21	3660480	Water seal	Ø 30	3	Lubricate with grease Molykote PG54	85	3660060	Shaft	3 marked	1	
22	3660470	Ring	anti-extrusion	3	Lubricate with grease Molykote PG54	86	3660320	Key		1	
23	3660210	Piston guide	front Ø 30	3	Lubricate with grease Molykote PG54	88	3660040	Cover		1	
24	3660490	Gasket	Ø 30	3	Lubricate with grease Molykote PG54	89	3660300	Ring	seal	1	
25	3660500	Ring	anti-extrusion	3	Lubricate with grease Molykote PG54	A	42835	Valve kit		1	
26	3660200	Piston guide	rear Ø 30	3		B	42838	Piston kit	Ø 30	1	
27	1320360	O-ring	Ø 47,35x1,78	3		C	42840	Oil seal kit		1	
28	3660310	Ring	seal	3		E	42843	Water seal kit	Ø 30	1	
40	3660010	Pump body		1		H	42853	Piston guide kit	Ø 30	1	
41	850260	Screw	TCEI M10x90	8	C=50Nm						
42	650530	Washer		8							
43	3660350	Oil plug	with oil dipstick	1							
46	3660360	O-ring	Ø 183,82x2,62	1							
47	780330	Screw	TCEI M6x20	8	C=10Nm / Loxeal 55-14						
50	3660170	Screw		3	C=20Nm / Loxeal 55-14						
51	3660340	O-ring	Ø 12x2	3	Lubricate with grease Molykote PG54						
52	3660140	Piston	Ø 30	3							
53	3660180	Plate		3							
55	3660081	Piston	guide	3							
56	3660330	Ring		6							
57	3660090	Pin		3							
58	3660990	Connecting-rod	bronze	3	C=22Nm / Loxeal 55-14						
65	3660030	Cover		1							
70	740290	O-ring	Ø 14x1,78	1	Lubricate with grease Molykote PG54						

Revision: 1

Oil type: SAE 15W40

Validity: < XX/YY = From week/year

Date: 09/10/2024

Oil quantity: 2,000 Kg

C=Tightening torque (Tolerance +0 ÷ -10%)

* = Not present for electric pump

28034 - RTX 70.200 N