
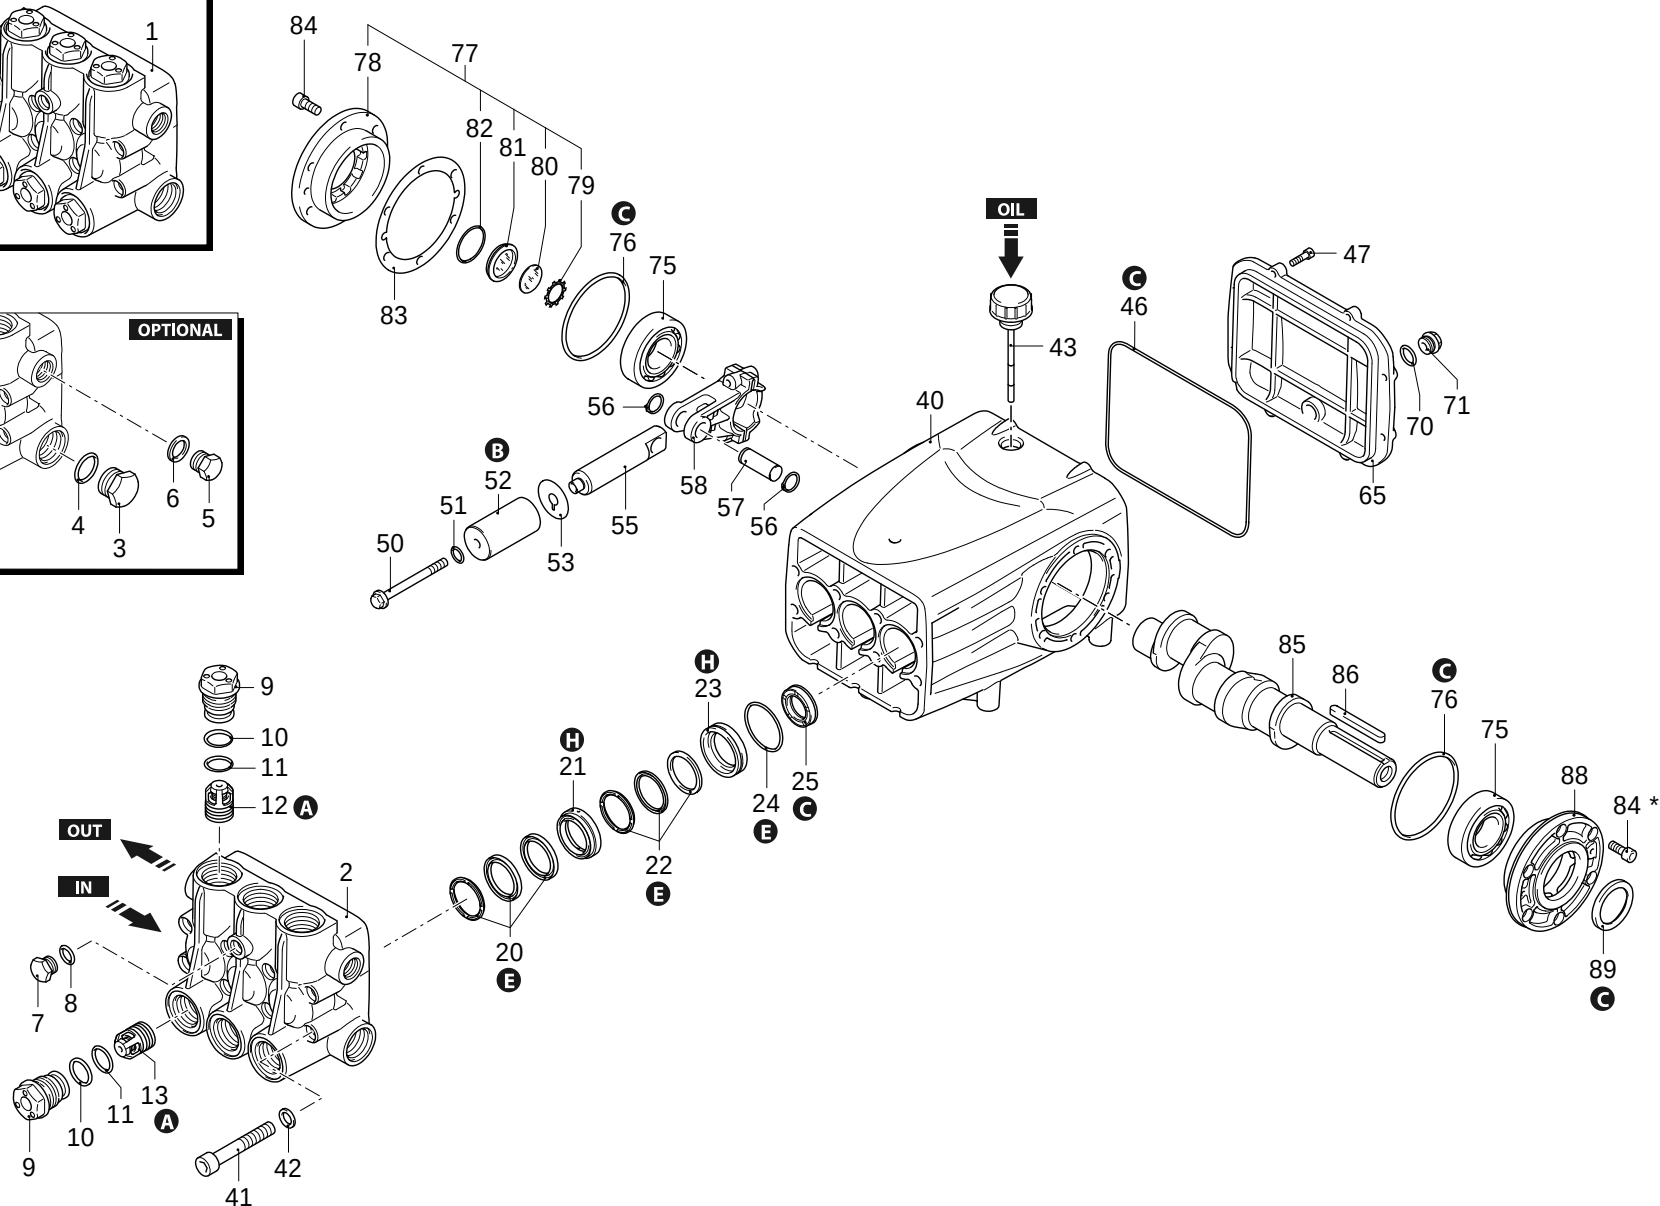





Series 366

RTX

N

1450rpm

ø 30mm

P	Code	Description		Q	Assembly prescription	Validity	P	Code	Description		Q	Assembly prescription	Validity
1	3669204	Head assembly	Ø 25 nickel plated	1			77	3669002	Cover		1		
2	3660880	Head		1			78	3660050	Cover		1		
3	2820620	Plug	1"G nickel	1	C=300Nm / Loxeal 55-14		79	1941290	Ring		1		
4	390291	O-ring	Ø 28,25x2,62	1			80	1941260	Plate		1		
5	2820490	Plug	1/2" G nickel	1	C=25Nm / Loxeal 55-14		81	1941270	Level gauge		1		
6	1540120	Washer		1			82	100410	O-ring	Ø 34,6x2,62	1		
7	1380690	Plug	1/4" G nickel	1	C=15Nm / Loxeal 55-14		83	3660260	Shim 0.05mm		1		
8	820510	O-ring	Ø 10,82x1,78	1			83	3660270	Shim 0.10mm		1		
9	3660890	Plug	nickel	6	C=300Nm		83	3660280	Shim 0.19mm		1		
10	2821390	Ring	anti-extrusion	6			84	180030	Screw	TCEI M8x20	6	C=24,5Nm	
11	1540630	O-ring	Ø 23,47x2,62	6	Lubricate with grease Molykote PG54		84*	180030	Screw	TCEI M8x20	6	C=24,5Nm	
12	3669051	Complete valve	delivery	3			85	3660060	Shaft	3 marked	1		
13	3669050	Complete valve	suction	3			86	3660320	Key		1		
20	2821210	Sealing system	secondary Ø 25	3	Lubricate with grease Molykote PG54		88	3660040	Cover		1		
21	3660230	Piston guide	front Ø 25	3	Lubricate with grease Molykote PG54		89	3660300	Ring	seal	1		
22	2821250	Sealing system	primary Ø 25	3	Lubricate with grease Molykote PG54		A	42835	Valve kit		1		
23	3660220	Piston guide	rear Ø 25	3			B	42837	Piston kit	Ø 25	1		
24	1320360	O-ring	Ø 47,35x1,78	3			C	42840	Oil seal kit		1		
25	3660310	Ring	seal	3			E	42842	Water seal kit	Ø 25	1		
40	3660010	Pump body		1			H	42852	Piston guide kit	Ø 25	1		
41	850260	Screw	TCEI M10x90	8	C=50Nm								
42	650530	Washer		8									
43	3660350	Oil plug	with oil dipstick	1									
46	3660360	O-ring	Ø 183,82x2,62	1									
47	780330	Screw	TCEI M6x20	8	C=10Nm / Loxeal 55-14								
50	3660170	Screw		3	C=20Nm / Loxeal 55-14								
51	3660340	O-ring	Ø 12x2	3	Lubricate with grease Molykote PG54								
52	3660150	Piston	Ø 25	3									
53	3660180	Plate		3									
55	3660081	Piston	guide	3									
56	3660330	Ring		6									
57	3660090	Pin		3									
58	3660070	Connecting-rod	aluminium	3	C=22Nm / Loxeal 55-14								
65	3660030	Cover		1									
70	740290	O-ring	Ø 14x1,78	1	Lubricate with grease Molykote PG54								
71	2282280	Plug	with magnet	1	C=20Nm								
75	3660290	Bearing		2									
76	3660740	O-ring	Ø 83x3	2									

Revision: 1

Oil type: SAE 15W40

Validity: < XX/YY = From week/year

Date: 09/10/2024

Oil quantity: 2,000 Kg

C=Tightening torque (Tolerance +0 ÷ -10%)

* = Not present for electric pump

26226 - RTX 50.300 N